


MIセンサ Application Note

Specifications of multi-type external oscillator

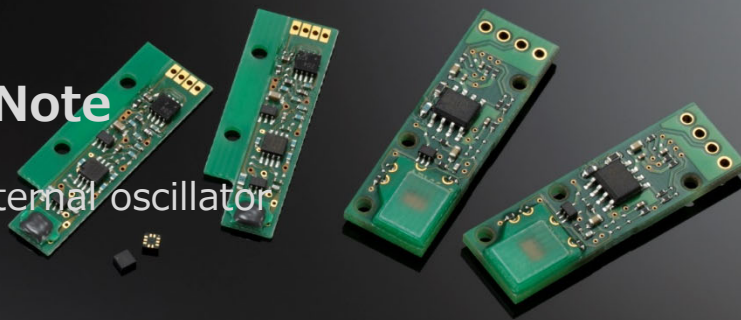

No. AMI-QA—007
2020/1/22


Target models

Type DM (MI-CB-1DM-S-A, MI-CB-1DM-S-B, MI-CB-1DM-M-A, MI-CB-1DM-M-B)

Type DH (MI-CB-1DH-S-A, MI-CB-1DH-S-B, MI-CB-1DH-M-A, MI-CB-1DH-M-B)

※Multi-type can be operated with users own Signal Generator.

External oscillator connection diagram when using multiple multi-type units.

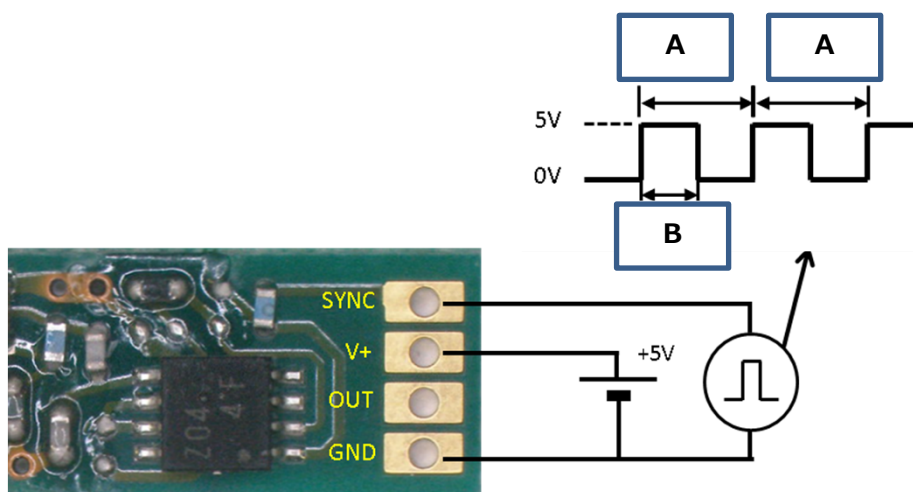

	Frequency	A	B
MI-CB-1DM-x-x	1,000k Hz	1.0μ sec	0.5 μ sec
MI-CB-1DH-x-x	650k Hz	1.53 μ sec	0.76 μ sec